



TOW BRIDLE SET-UP and USE


Attaching bridle to harness

Insert the riser through the square Stainless Steel link and clip your carabiner through both the riser and the loop of webbing under the link. Attach your bridle speed system to the tow assist speed system cord, making sure that it passes through the D shaped Stainless Steel guide. If desired, attach your foot operated speed system to the riser speed.



Note: Ensure that when your riser speed system is connected to the tow assist cord, that together, it's long enough to completely disengage leaving slack in the system once released from the tow

Note: If your riser speed system is longer than that of the tow assist cord on the towing bridle, DO NOT ATTACH IT.

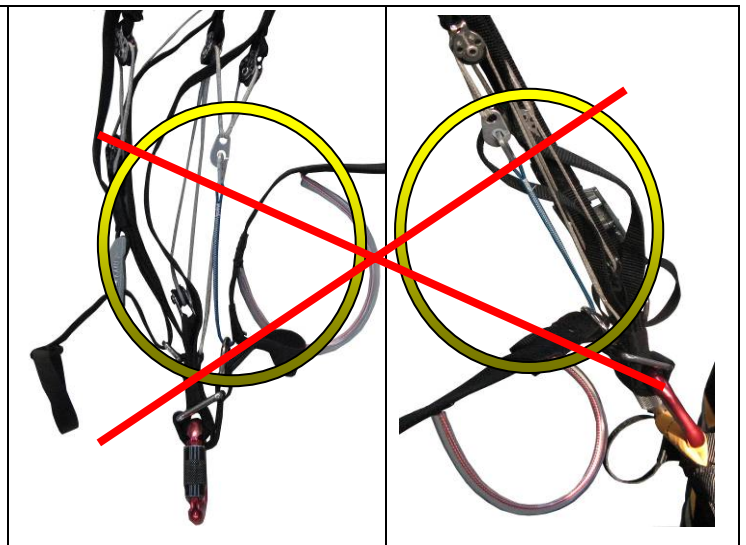

Attching bridle to tow line

There are 2 webbing parts that form the bridle. Place the thick cord loop from the long side of the bridle through the thick cord loop on short side of bridle to hold the 2 parts together. Now hook the blue loop at the end of the longer part through the tow line weak link. Pass the shorter orange loop through blue loop and the heavy cord loop, then through the grommet in the bridle. Secure with the pin. Tuck the pin into the pocket.

Pull the tow release handle to release from the tow.

